



BluE Series

Three Phase / On-grid / 3–12 kW

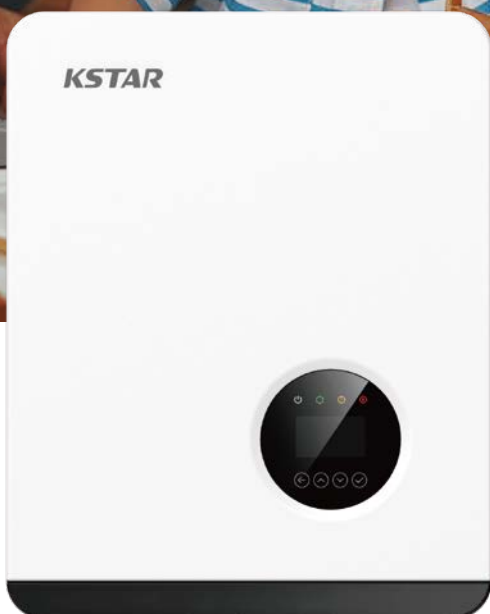

Max. PV Voltage up to 1100 V
Type II DC / AC SPD

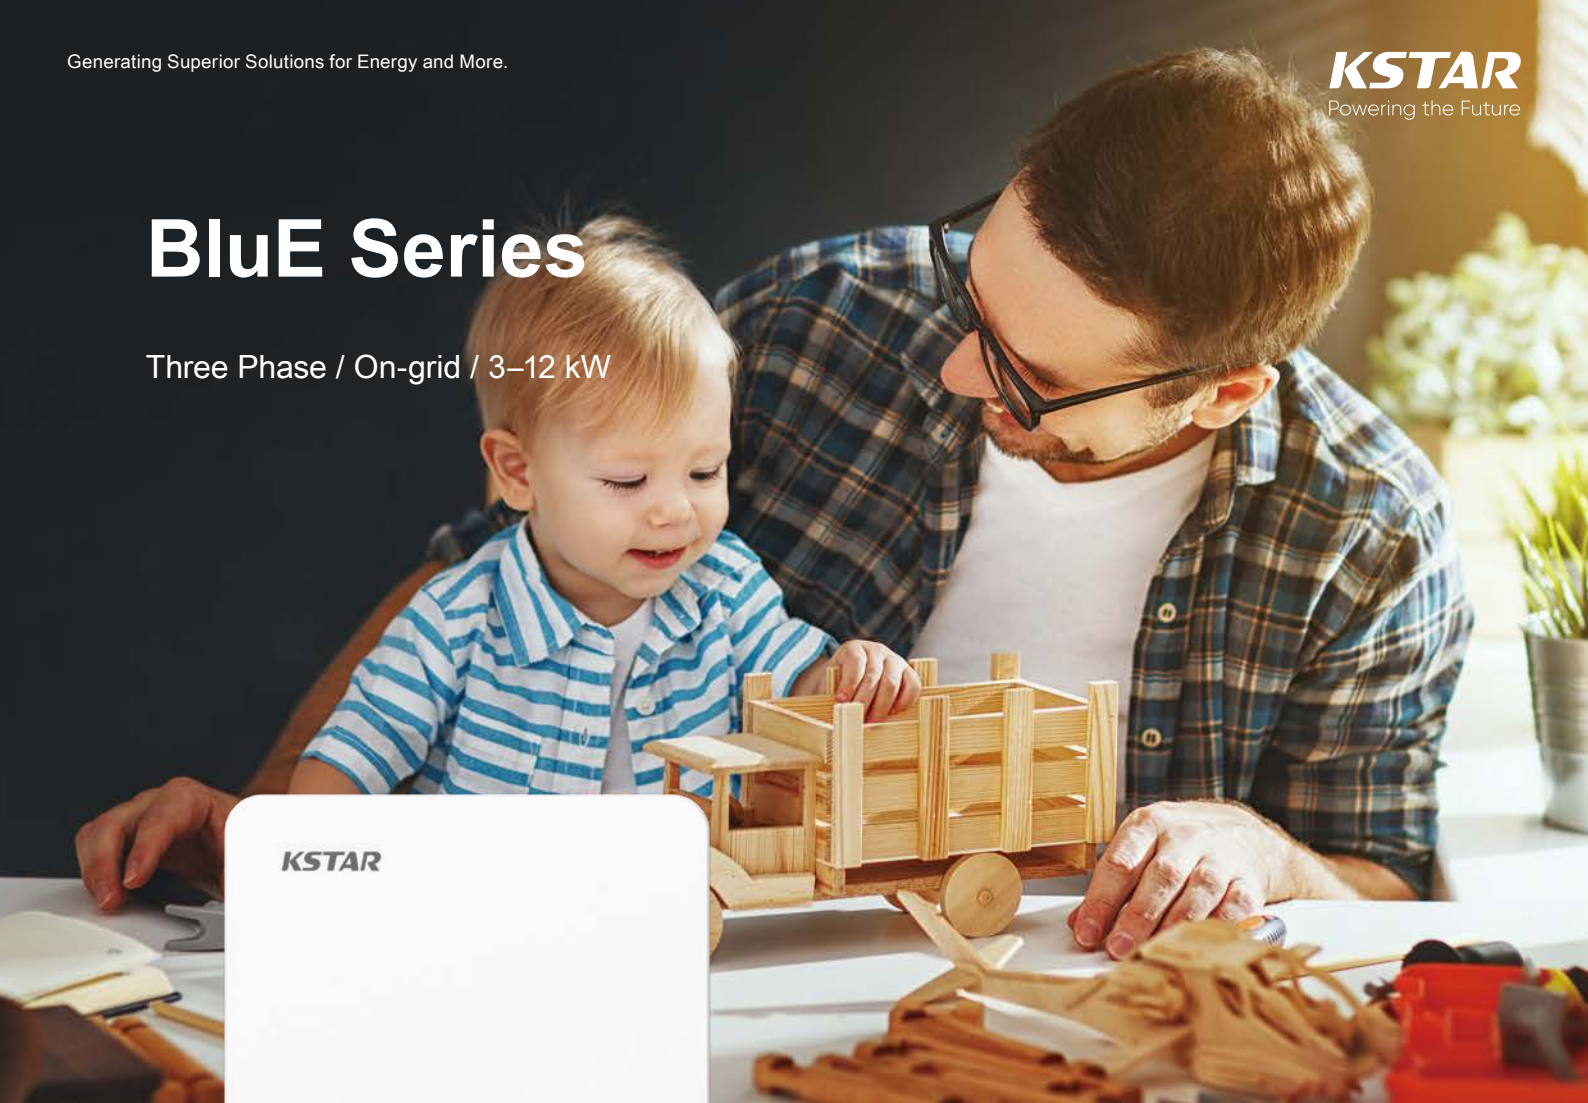

Compatible for Big Capacity PV Panel
WiFi / 4G Plug Optional



DC / AC Ratio up to 1.3
IP66 Protection



High Efficiency up to 98.6%
Smaller and Lighter

MODEL	BluE-3KT-M1	BluE-4KT-M1	BluE-5KT-M1	BluE-6KT-M1	BluE-8KT-M1	BluE-10KT-M1	BluE-12KT-M1
Input (DC)							
Max. DC Voltage	1100 V						
Nominal Voltage	650 V						
Start Voltage ¹⁾	250 V						
Number of MPPT	140 ~ 1000 V						
Strings per MPPT	2						
MPPT Voltage Range	1						
Max. Input Current per MPPT	15 A						
Max. Short-circuit Current per MPPT	20 A						
Output (AC)							
Nominal AC Output Power	3000 W	4000 W	5000 W	6000 W	8000 W	10000 W	12000 W
Maximum AC Output Power	3300 VA	4400 VA	5500 VA	6600 VA	8800 VA	11000 VA ²⁾	13200 VA
Nominal AC Voltage	400 V / 230 V, 3P+N+PE						
AC Grid Frequency Range	50 Hz / 60 Hz (±5 Hz)						
Maximum Output Current	4.8 A	6.4 A	8.0 A	9.6 A	12.8 A	16.0 A ²⁾	19.2 A
Power Factor (Φ)	-0.8 (Lagging) ~ 0.8 (Leading)						
THDi	< 3% (Nominal Power)						
Efficiency							
Max. Efficiency	98.4%	98.4%	98.4%	98.4%	98.6%	98.6%	98.6%
Euro Efficiency	97.5%	97.5%	97.5%	97.5%	98.0%	98.1%	98.1%
Protection devices							
DC Switch	Yes						
Output Over Current Protection	Yes						
Anti-islanding Protection	Yes						
DC Reverse Polarity Protection	Yes						
String Fault Detection	Yes						
DC / AC Surge Protection	DC Type II; AC Type III; Type II Optional						
Insulation Detection	Yes						
AC Short Circuit Protection	Yes						
General Specifications							
Dimensions (W x H x D)	380 × 483 × 161 mm						
Weight	< 17 kg						
Operating Temperature Range	-25°C ~ +60°C						
Cooling Type	Natural cooling						
Max. Operating Altitude	4000 m						
Max. Operating Humidity	0 ~ 100% (No condensation)						
AC Output Terminal Type	Connector						
IP Class	IP66						
Topology	Transformerless						
Communication	RS-485 / Wifi / 4G						
Display	LCD						
Certification & Standard	EN/IEC 62109-1/2; IEC/EN 61000-6-2; IEC/EN6 1000-6-4; IEC 61683; IEC 60068; IEC 60529; IEC 62116; IEC 61727; EN 50549-1; VDE-AR-N-4105; VDE 0126-1-1; CEI 0-21; G98/G99 ; C10/11; NB/T 32004-2018; GB/T 19964-2012;						

1) Minimum voltage for inverter to start power output.

2) According to the C10/11 of Synergrid, the maximum AC output power is 10 kVA and therefore the maximum AC output current is 14.5A.